




ZXIMCU sMesh720

Broadband Mesh Airborne Device



The sMesh ("s" is smart, means highly flexible) broadband ad hoc products, based on LTE, combine mature OFDM technology with flexible channel coding. They feature optimized designs for the physical layer and data link layer, while inheriting the excellent RF (radio frequency) performance of carrier-grade products. This ensures the products' stability, reliability, and adaptability to harsh environments.

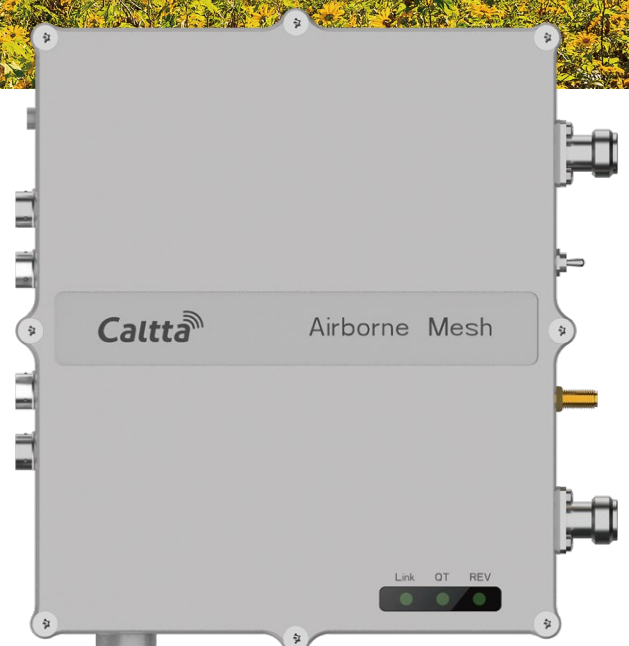

Features

- **One Device, Multiple Usages**

Can be used on board, on vehicles, or in fixed locations, and can be deployed flexibly as needed.

- **Diversified Services**

Support voice, data, positioning, video, etc. Support VPN transparent transmission, interconnection with systems like satellites, public networks and LTE base stations.

- **Flexible Networking**

Ad hoc networking, with flexibly configurable carrier bandwidth. Support any network topology such as point-to-multipoint, chain relay, mesh, and hybrid structures, as well as multi-hop relaying and relay forwarding.

- **Easy Management**

With professional dispatching and management tools, it can monitor the working status of devices at each node, wireless link quality in real-time, and view GIS positioning information, etc.



Industry Applications



Forest Fire Fighting



Fire Fighting and Rescue



On-site Rescue for Natural Disasters



Chemical Park



Security for Major Events



Maritime Communication



Coverage along the Power Grid



Public Safety

Accessories

Standard



Power Cord (Fixed)



Aviation Plug Network Cable

Optional



Airborne Antenna



Wi-Fi Antenna




GPS Module



HDMI Encoder



USB HD Camera



PAD Dispatch Console



Laptop Dispatch Console

Specifications

General	
Frequency	1.4GHz, Other bands customizable
Protocol	TDD
Transmission	COFDM
Bandwidth	1.25MHz/2.5MHz/5MHz/10MHz/20MHz
Transmitting Power	2×2W
Receiving Sensitivity	≤-103dBm
Path	2 paths, 2T2R
Data Rate	≥50Mbps, MIMO≥90Mbps
Networking	Ad hoc network
Ad Hoc Network Maximum Nodes	More than 64 nodes
Hop	Suggest≤9 hops
Encryption	DES/AES256

Physical	
Dimensions	215mm×185mm×46mm (Without connector)
Weight	About 1.5kg
Port	Network port: data transmission and network management, aviation plug structure Wi-Fi(SMA): connect Wi-Fi antenna RF(N): connect RF antenna GPS: GPS antenna, aviation plug structure Power port: external power supply, aviation plug structure.

Electrical	
Power Supply	Adapter: 100~240V AC 50/60Hz DC input: 27~36V DC

Environmental Conditions	
Operating Temperature	-40°C~ +60°C
Storage Temperature	-50°C~ +70°C
Air Pressure Range	70 ~ 106 kPa
Dust and Water Resistance	IP67
Seismic Strengthening	GB/T 4798.7-2007 (Part 7: Portable & Non-stationary Use, Above Grade 7M2)

General Disclaimer:
The specifications in this document are in accordance with the applicable standard test.
Due to the continuous technology development, Caltta may change the specifications without prior notice.

Caltta **CALTTA TECHNOLOGIES CO.,LTD.**

Address: 12F/Building G2, International E-City, Nanshan, Shenzhen, China

Web: <https://www.caltta.com/> **E-mail:** sales@caltta.com **Post:** 518052



Privacy Statement: Caltta Technologies is a leading provider of comprehensive critical communication solutions and committed to protecting personal data in accordance with applicable laws and regulations and with technologies including anonymization and data encryption and necessary security management measures.