

General	
Digital Protocol	DMR ETSI TS102 361-1, -2, -3, -4 (optional); TDMA
Frequency	UHF1: 400-470MHz UHF2: 450-520MHz UHF3:350-400MHz VHF: 136-174MHz
Channel Capacity	1024
Zone Capacity	64
Channel Spacing	12.5KHz/20KHz/25KHz
Frequency Stability	±0.5ppm
Operating Voltage	7.4V
Battery Capacity	2600mAh (Standard) / 2000mAh (optional)
Battery Life	Analog: 16 Hours Digital: 20 Hours (5: 5: 90 working cycle, high power transmission)
Size (H x W x D)	100×54.5×36.5mm (without antenna)
Weight	About 290g (with antenna and battery)
Screen	1.75" Transflective LCD, 240×180, 4 Lines Text
Vocoder	AMBE++
Bluetooth	BT4.2(optional)
Location	GPS (optional)
Supported Features	Man Down, Lone Worker, Real-time Clock, Vibration, VOX, Monitoring, Stun, Voice Announcement, Scan, Roaming, Priority Interruption, Ad Hoc Switch, Dynamic Dual Time Slot, Full Duplex Call, Enhanced Channel Access
Encryption	Support 40bit Basic Encryption, 128/256bit Advanced Encryption is optional

Environmental	
Operating Temperature	-30℃ ~ +60℃
Storage Temperature	-40℃ ~ +85℃
ESD	IEC 61000-4-2 (level 4) ±8kV (Contact) ±15kV (Air)
Dust and Water Resistance	IP68
Reliability	MIL-STD-810G

GPS	
Accuracy specs are for long-term tracking (95th percentile values >5 satellites visible at nominal -130 dBm signal strength)	
TTFF (Time to First Fix) - Cold Start	<60s
TTFF (Time to First Fix) - Hot Start	<10s
Horizontal Accuracy	<10m

Receiver	
Sensitivity (Analog)	0.18uV(12dB SINAD)
Sensitivity (Digital)	0.18uV (5% BER)
Adjacent Channel Selectivity	60 dB@12.5KHz/70 dB@20/25KHz (TIA603A) 60dB@12.5KHz /70 dB@20/25KHz (ETSI)
Intermodulation	70 dB (TIA603D) 65 dB (ETSI)
Spurious Rejection	70 dB (TIA603D) 70 dB (ETSI)
Blocking	80dB(TIA603D) 84dB(ETSI)
Co-channel Rejection	-12~0 dB @12.5KHz/-8~0 dB @20/25KHz
Hum and Noise	-40 dB@12.5KHz /-43 dB@20KHz /-45 dB@25KHz
Rated Audio Power	0.5W
Max Audio Power	2.0W
Rated Audio Distortion	≤3%
Audio Response	+1~-3dB (TIA603D)
Conducted Spurious Emission	-57 dBm (TIA603D)

Transmitter	
Low Power Output	1W
High Power Output	4W (UHF1&UHF2&UHF3) or 5W (VHF)
FM Modulation	12.5KHz: 11K0F3E / 20KHz: 14K0F3E / 25KHz: 16K0F3E 12.5KHz Data Only: 7K60F1D&7K60FXD 12.5KHz Voice Only: 7K60F1E&7K60FXE 12.5KHz Voice And Data: 7K60F1W
4FSK Digital Modulation	
Conducted/ Radiated Emission	-36dBm ≤1GHz ; -30dBm >1GHz
Modulation Limiting	±2.5KHz @12.5KHz /±4KHz @20KHz /±5.0KHz @25KHz
FM Hum and Noise	-40 dB@12.5KHz /-43dB@20KHz /-45 dB@25KHz
Adjacent Channel Power	60 dB@12.5KHz /70 dB @20/25KHz
Audio Distortion	≤3%
Audio Response	+1~-3dB(TIA603D)

General Disclaimer:
The specifications in this document are in accordance with the applicable standard test. Due to the continuous technology development, Caltta may change the specifications without notice.

Professional Digital Radio

Compact Size, Exceptional Performance



Features

Full Encryption

Support 40bit basic encryption. 128/256bit AES encryption are optional. It also supports lone worker, man-down and other functions to protect users’ safety.

Loud and Clear Voice

With a 2W speaker and optimized audio design, PH660 ensures clear communication even in a noisy environment.

Compact Design

Only 290g(antenna and battery included) in weight and 100mm in height. Portable and easy to operate. The surface is designed with anti-slip texture, making it comfortable to hold and anti-slip even in wet environments.

Military Standard

MIL-STD-810G standard, meets shock and drop resistance at various levels.

Digital-and-analog Compatible

Digital-and-analog compatible, PH660 realizes the smooth evolution of the system. It also supports digital direct/repeater dual-time slots and automatic cross-site roaming.

IP68 Protection

IP68 rated, PH660 is resistant to water and dust, ensuring normal operation in extreme environments.

Large-capacity Battery


With a 2600mAh large-capacity battery and digital power reduction technology, PH660 can work for at least 20 hours in digital mode(5:5:90), meeting the needs of long work shifts.

Complete Services

In addition to basic DMR voice and data services, PH660 also supports many optional features such as GPS , Bluetooth , VOX , etc.



Scenarios

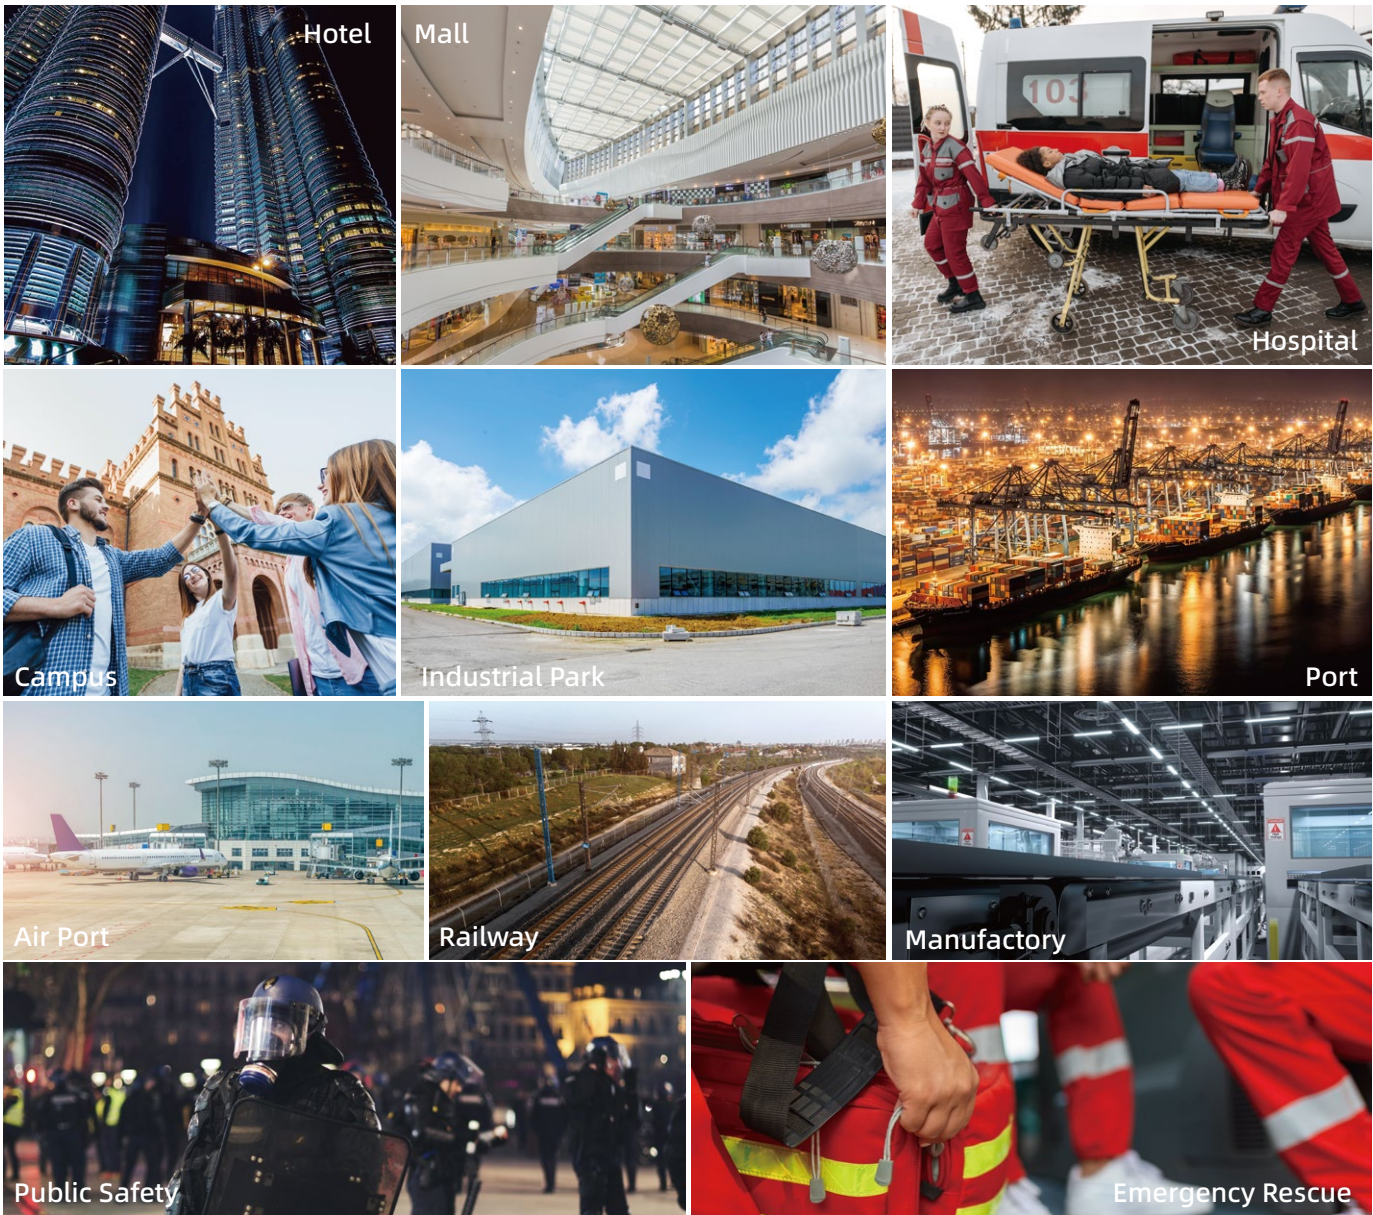

Accessories

Standard						
						
Desktop Charger	2600mAh Li-ion Battery	Power Adapter	Antenna	Belt Clip		
Optional						
						
8-way Charger	Bluetooth Earphone	Bluetooth PTT Ring	Transparent Tube Earphone	C-Style Earphone	Remote Microphone	Programming Cable